


no-sew iron fusion CURTAIN PANELS

1


Same length as curtain fabric.

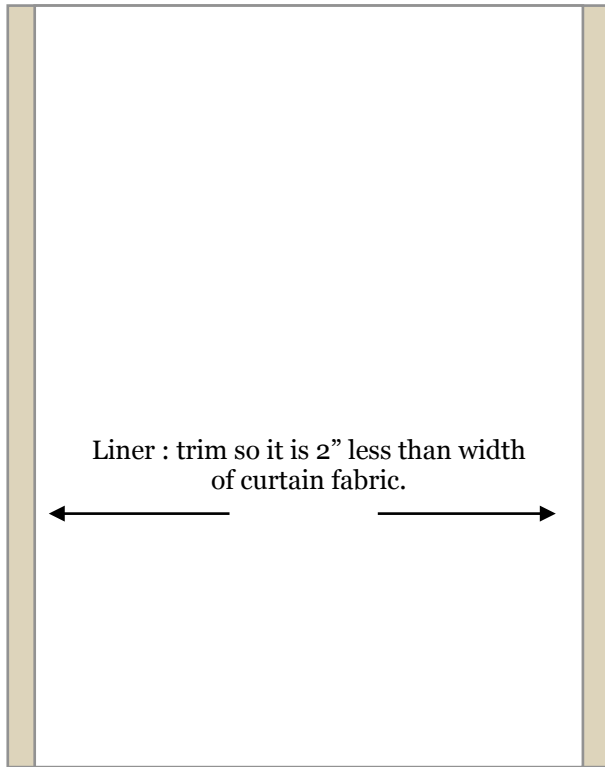

Cut Liner and Curtain fabric to be 8" longer than desired finished curtain length. Trim the width of the lining fabric to be 2" less than the width of the curtain fabric.

2

Leave 12"
un-fused for now.

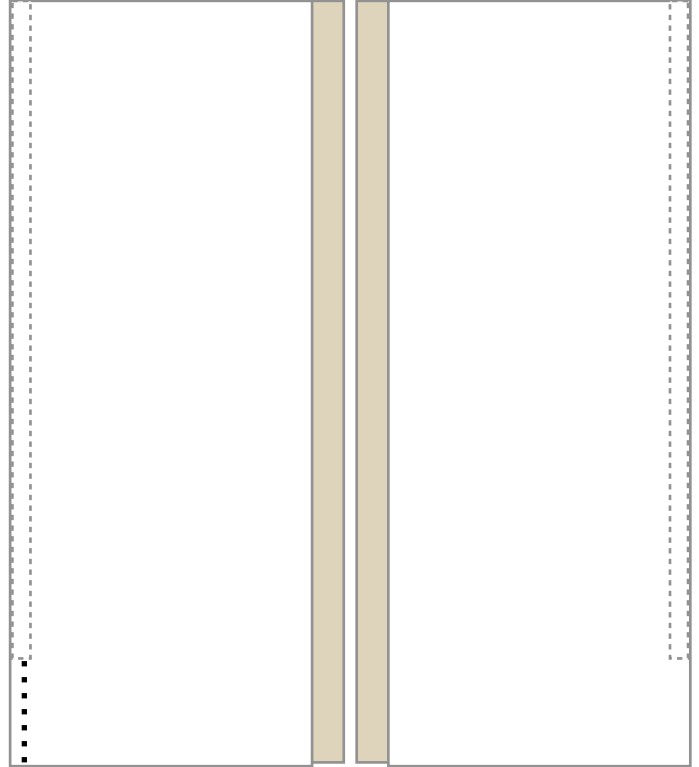

With right-sides facing in, iron-fuse the side seams together by aligning them on the left, fusing together, then aligning seams on the right, fusing together. Leave the bottom 12" un-fused to allow for hemming after hanging to ensure length is precise.

3



Center the liner on the curtain fabric so that about 1" of the fabric curtain is folded on the back of the panel where it connects with the lining. Iron-fuse the top seam together. Inverse so that the right-sides are out. Press the sides and the top seams so they lay flat.


4



Add Pleating Tape :

Measure the pleating tape to be 1/2 shorter on each side. Iron-fuse the pleating tape onto the top of the back of the curtain panel using three strips of the iron-fusing tape to firmly secure it to the panel.

5

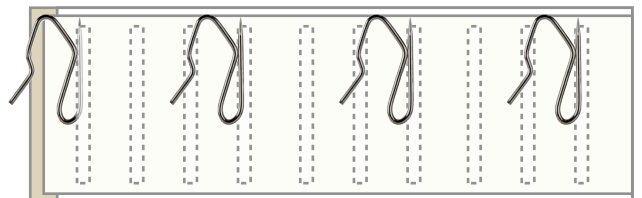

Insert Hooks : Insert pleating hardware on every 3rd position (or how you desire). Insert pin hooks so they will be just under top of the curtain so the hardware won't show when hung. I use about 20 hooks. Hang curtains, two hooks for every ring.

6

Hem Length : Mark desired length. Cut fabrics so they are 6" + desired length. While hanging, fold in and iron-fuse a 6" hem for the liner and curtain fabric individually, then iron-fuse the sides together.